



# SEP50408S (66POLE)

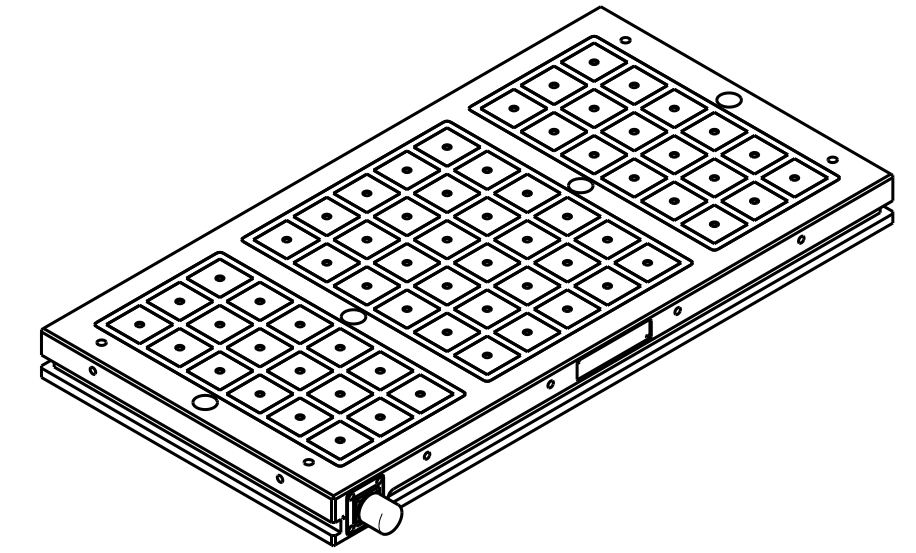

Isometric view (1:8)

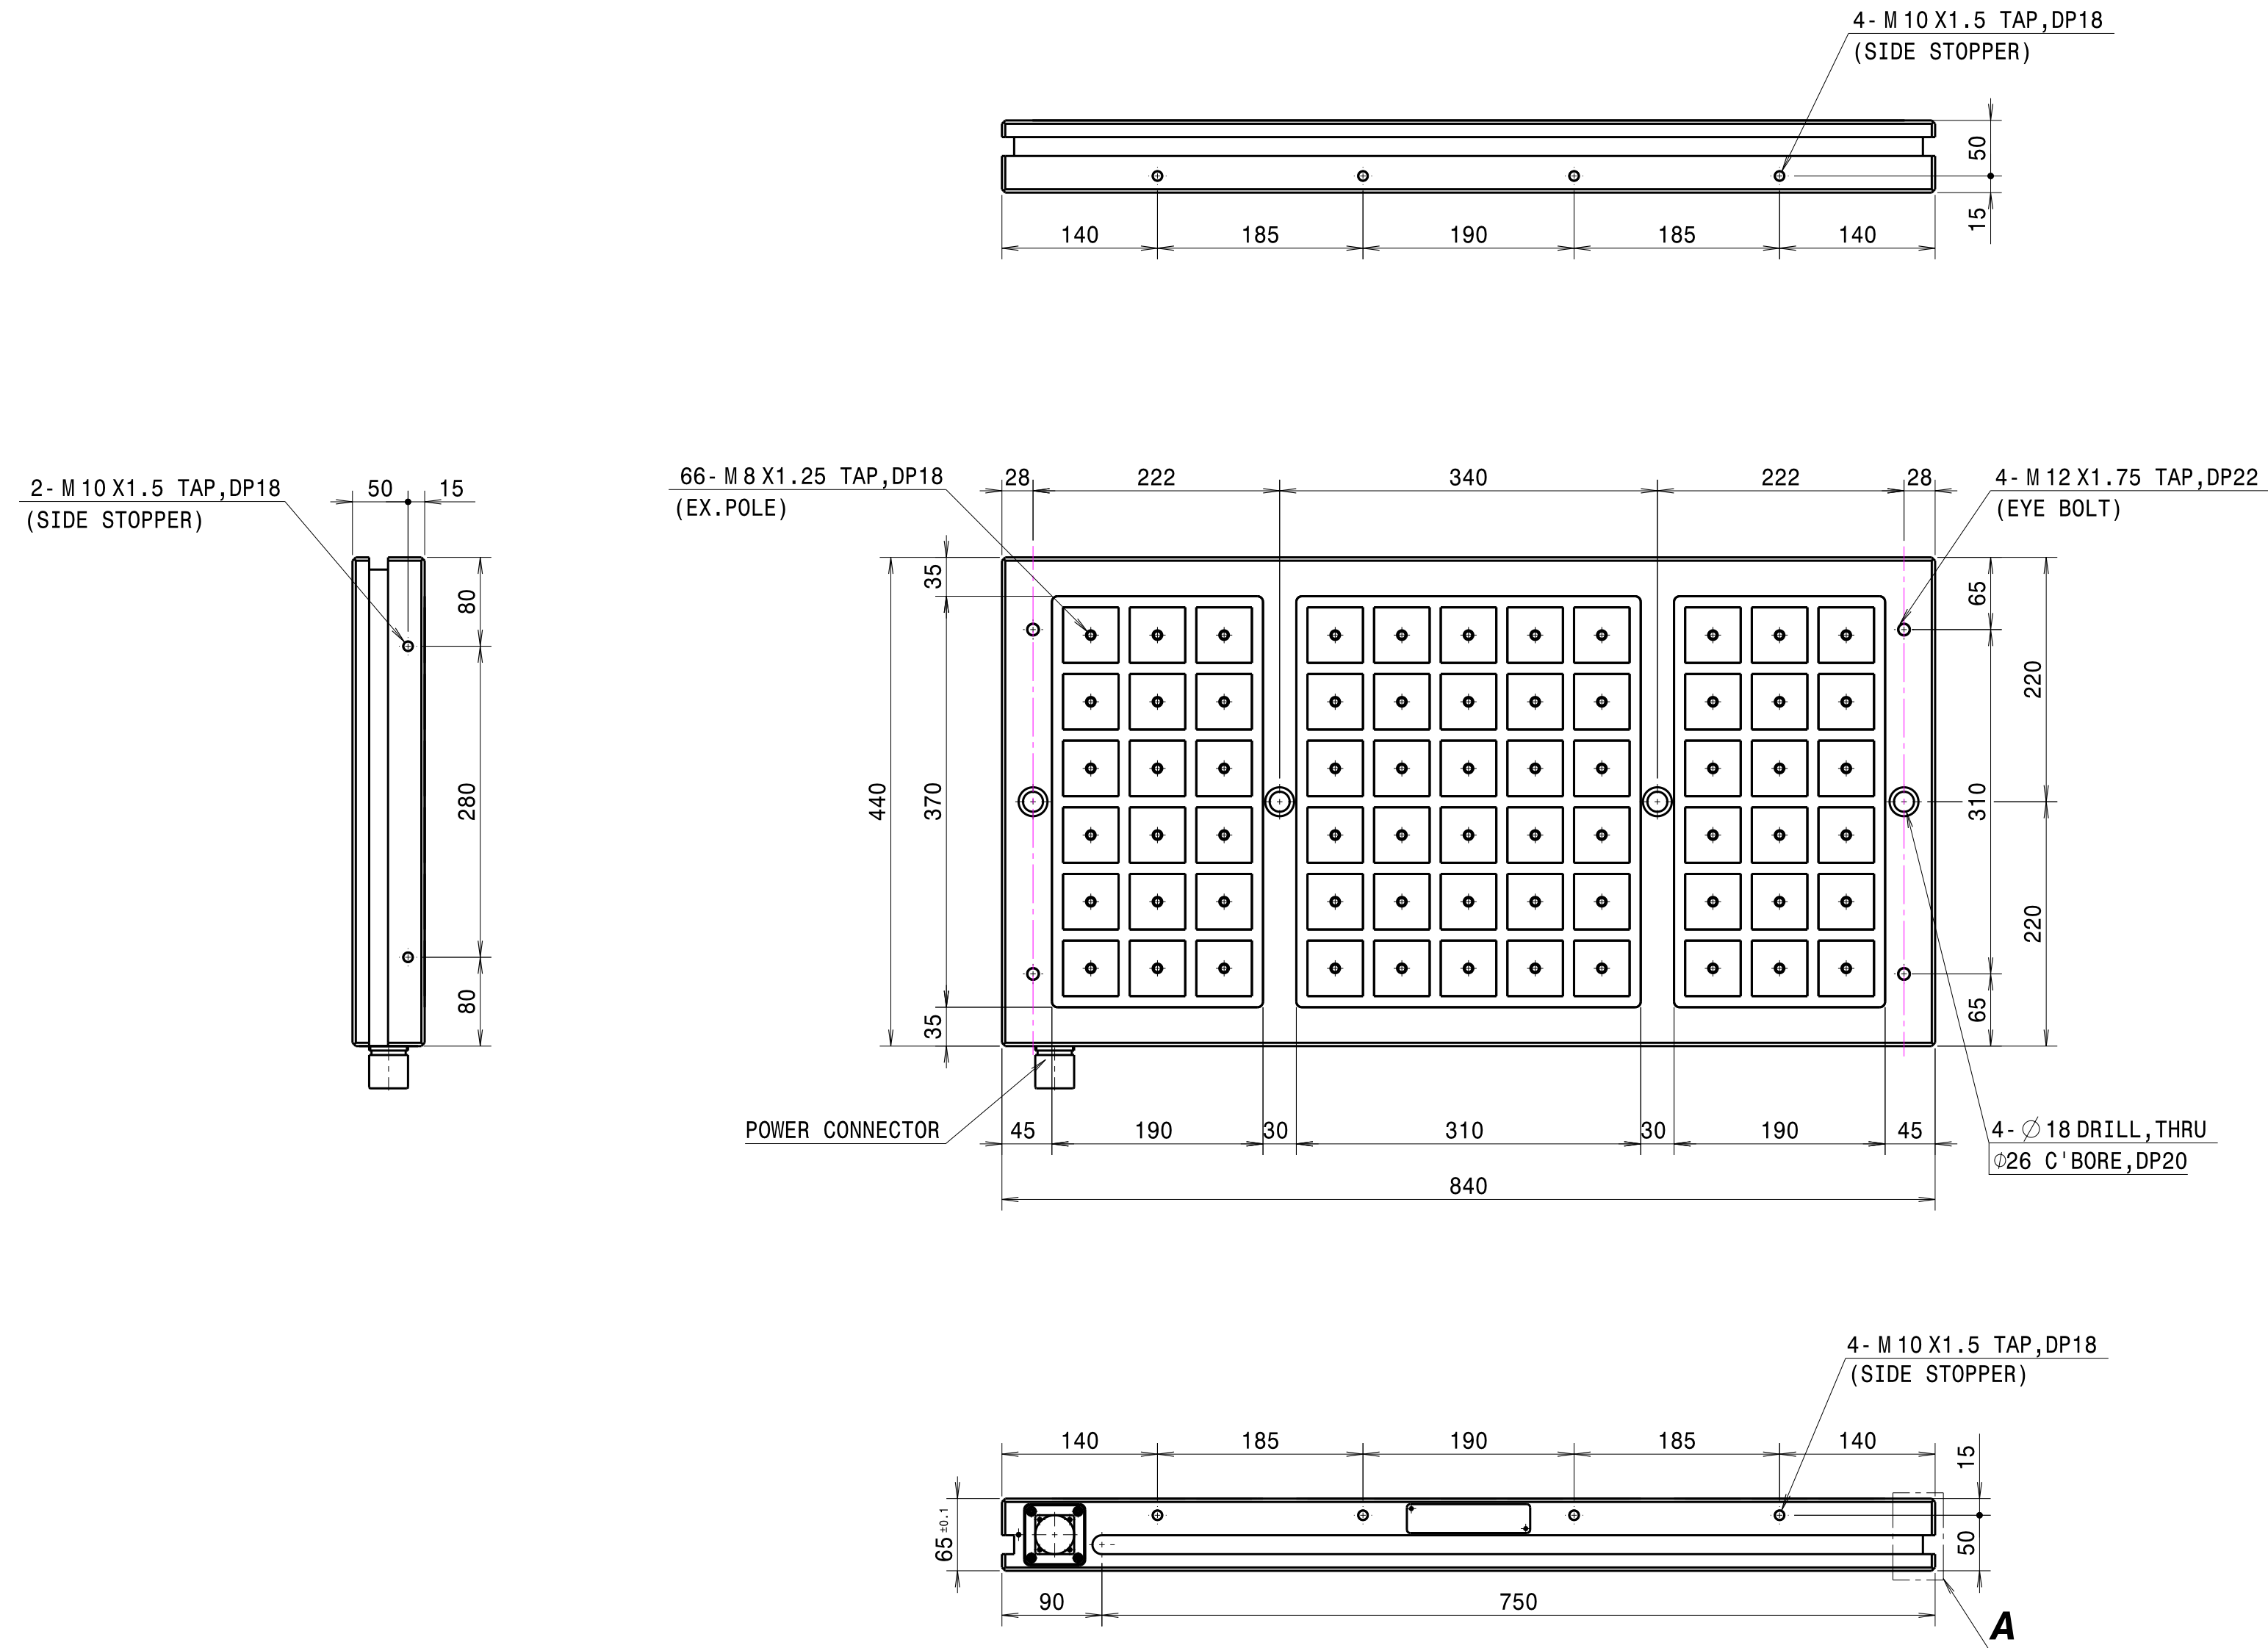

Detail A (2:3)  
(SIDE SLOT)

						SURFACE FINISH	~ (▽), (▽▽), (▽▽▽)	APPROVED	TITLE		SEP50408S00-HR_ASS'Y	Q'TY	1	
						GENERAL TOLERNCE (MACHINING)	GENERAL CHAMFER	C1.0	CHECKED	ASS'Y		N/A	W.T (kg)	N/A
						OVER	TO	HEAT TREATMENT	H <sub>R</sub> C	N/A	CHECKED	MODEL		N/A
						- 6	±0.1	HEAT TREATMENT HARDNESS				MAT.		N/A
						6 - 30	±0.2	HEAT TREATMENT METHOD			DESIGNED	DRG. NO.		A2
						30 - 120	±0.3			SJ.KIM		REF. DRG. NO.		SEP50408S00-HR
						120 - 315	±0.5			DRAWN		When		1/1
						315 - 1000	±0.8							1/1
						1000 - 2000	±1.2							1/1
						2000 - 4000	±2.0							1/1
SUFFIX	MARK	SUBJECT		DATE	NAME	CHECKED							상원이엔지	